



MMI

**WAFER, HOUSING & TERMINAL
PITCH: 5.00x5.00mm**

5.00 mm WAFER - MCz 001 STRAIGHT TYPE - P

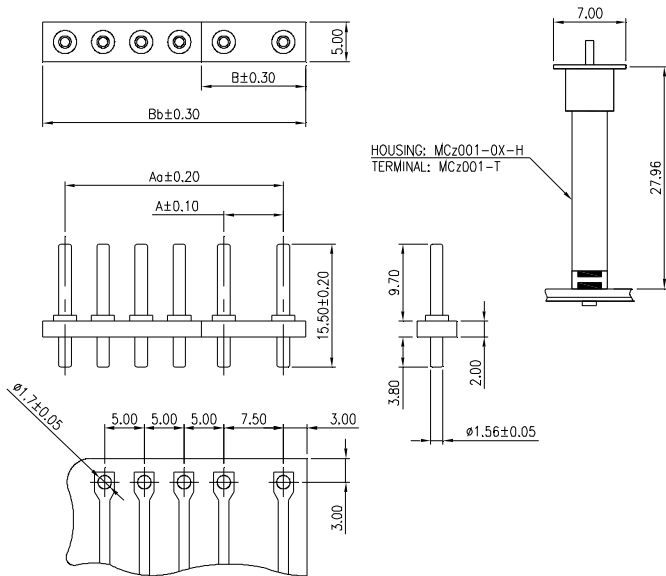


SPECIFICATIONS

VOLTAGE RATING: 250V AC/DC
 CURRENT RATING: 5A AC/DC
 WITHSTAND VOLTAGE: 1500V AC/MINUTE
 INSULATOR RESISTANCE: 1000M OHM MIN.
 TEMPERATURE RANGE: -25°C ~ +85°C
 CONTACT RESISTANCE: 20m OHM MAX.

MATERIALS

BASE: NYLON 66, UL 94V-0, PHENOLIC BAKELITE
 CONTACT: BRASS, TIN PLATED
 SOLDER TABS: BRASS, TIN PLATED

RECOMMEND PCB LAYOUT AND ASSEMBLY LAYOUT

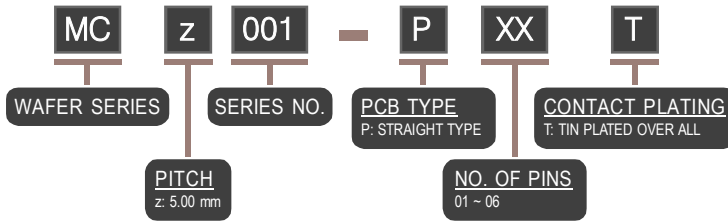

PART NO.	CIRCUITS	DIMENSION			
		A	Aa	B	Bb
MCz001-P01T	1	--	--	5.50	--
MCz001-P02T	2	7.50	--	13.10	--
MCz001-P03T	3	--	12.50	--	18.10
MCz001-P04T	4	--	17.50	--	23.10
MCz001-P05T	5	--	22.50	--	28.10
MCz001-P06T	6	--	27.50	--	33.10

NOTE : SOME SIZES, STYLES AND OPTION ARE NON-STANDARD, NON-CANCELLABLE, NON-RETURNABLE