


REVISIONS					
SYM	DESCRIPTION	DATE	APPROVED	SYM	DESCRIPTION
Δ				Δ	
Δ				Δ	
**CUSTOMER DRAWING FOR REFERENCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!					218

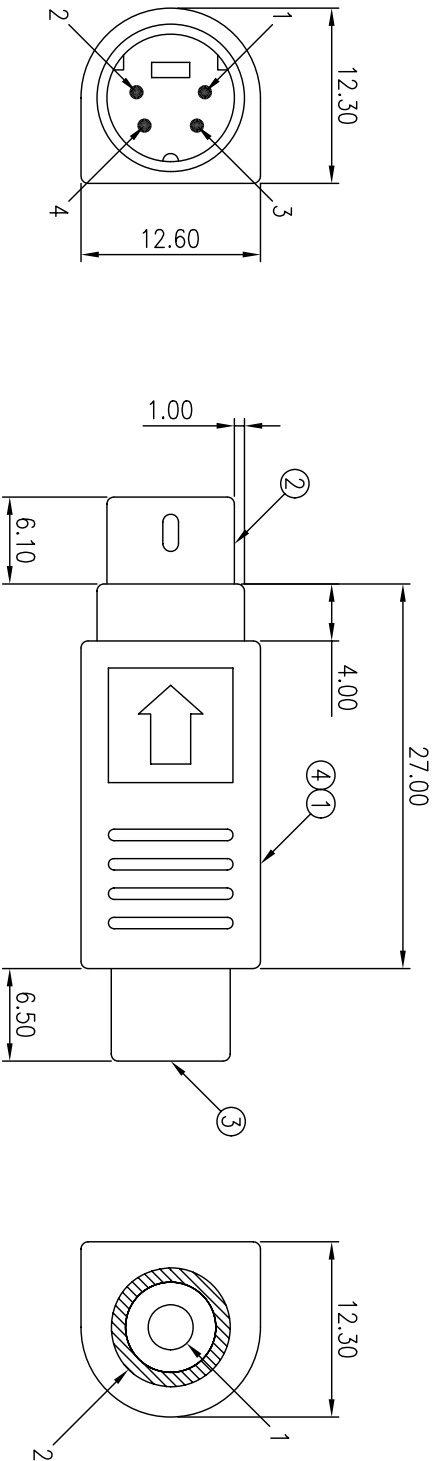

ELECTRONIC TEST CONDITION:
100% OPEN-SHORT & MISWIRE TEST.
CONDUCTIVE RESISTANCE: 2Ω MAX
INSULATION RESISTANCE: 20MΩ MIN. AT DC200V

ORDER INFORMATION:
MD-RCA002
MD: MINI DIN JACK
RCA: RCA JACK
002: SERIES NO.

4	PVC	45P PVC, COLOR: BLACK
3	CONN.	RCA JACK INSULATED: YELLOW, CONTACT GOLD FLASH GOLD FLASH SHELL
2	CONN.	MINI DIN 4P MALE CONNECTOR. SOLDER TYPE INSULATOR BLACK. CONTACT GOLD FLASH, NICKEL GOLD FLASH
1	CABLE	UL1007 28AWG TINNED COPPER WIRE
NO	MATERIAL	INSULATOR: PVC THE COLOR DOES NOT LIMIT DESCRIPTION

TOLERANCES UNLESS OTHERWISE SPECIFIED			SIGNATURES		DATE	MODEL
±0.25			DRAWN	KEN	15/JUN/06	TITLE
			CHECKED	WENDY	15/JUN/06	MINI DIN 4PIN TO RCA JACK
SYMBOL	UNIT	SCALE	APPROVALS			NO.
Δ	mm	2/1				MD-RCA002