
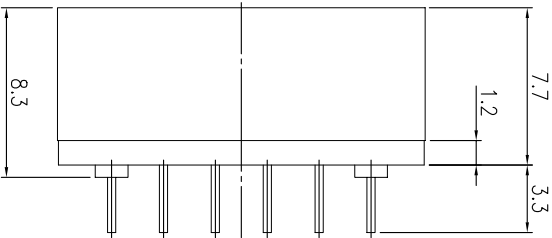


NOTE: THIS DEVICE IS ROHS COMPLIANT.

SYMBOL		DESCRIPTION		DATE		APPROVED		DATE		APPROVED	
Δ	NOTE ROHS	STANDARD	07/JUN/05	CONNIE	Δ						
Δ					Δ						


8	7	6	5	4	3	2	1
---	---	---	---	---	---	---	---

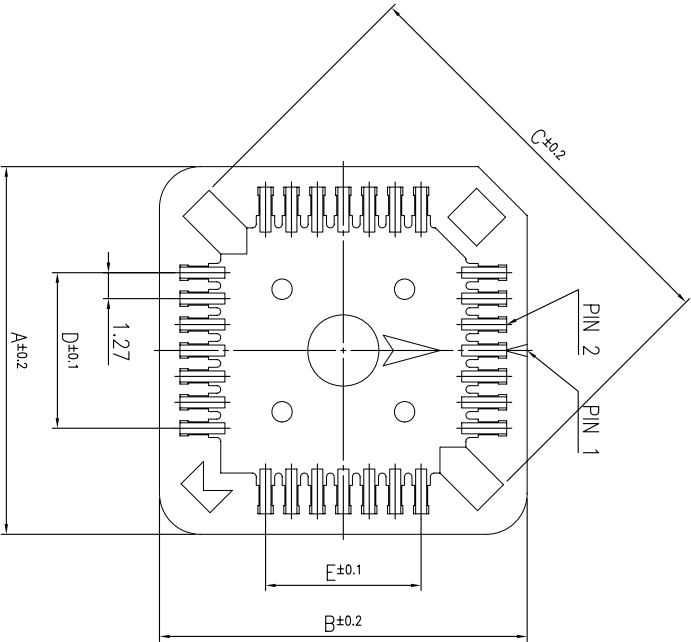

FEATURES:
ACCEPTS JEDEC LEADED TYPE: PLCC.
CONTACT SOLDER TAILS ON 2.54mm SQUARE GRID.
MATERIAL:
CONTACT MATERIAL: PHOSPHOR BRONZE.
CONTACT PLATING: TIN OR GOLD SELECT PLATED
INSULATOR MATERIAL: 40% GLASS FILLED P.P.S.(UL94V-0)
ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 1A MIN.
WITHSTANDING VOLTAGE: AC 500V R.M.S.
INSULATION RESISTANCE: 1000MΩ MIN.
CONTACT RESISTANCE: 30mΩ MAX.
OPERATING TEMPERATURE: -50~+105°C

ORDER INFORMATION:
PLCC000-PXXT-P
PLCC: PLCC CONNECTOR
000: SERIES NO.
P: PCB TYPE, STRAIGHT
XX: NO. OF CONTACT
I: CONTACT PLATING,
e.g. I: TIN PLATED (STANDARD)
e.g. Gt: GOLD FLUSH ON CONTACT, TIN PLATED ON SOLDER TAIL
P: HOUSING MATERIAL,
-P, PBT
-PS, PPS

PART NO.	NO. OF CONTACT	DIMENSION				
		A	B	C	D	E
PLCC000-P20T-P	20	15.50	15.50	16.70	5.08	5.08
PLCC000-P28T-P	28	18.00	18.00	20.38	7.62	7.62
PLCC000-P32T-P	32	18.00	20.58	22.34	7.62	10.16
PLCC000-P44T-P	44	23.58	23.58	27.60	12.70	12.70
PLCC000-P52T-P	52	25.90	25.90	31.40	15.24	15.24
PLCC000-P68T-P	68	31.80	31.80	38.34	20.32	20.32
PLCC000-P84T-P	84	36.20	36.20	45.60	25.40	25.40

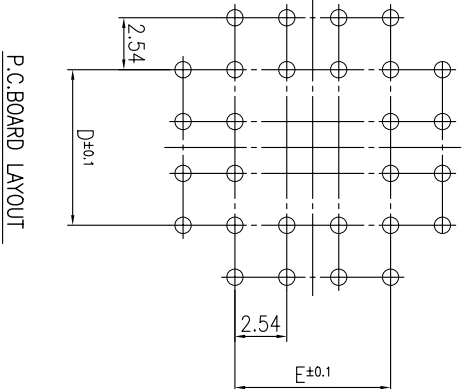

TOLERANCES UNLESS OTHERWISE SPECIFIED		SIGNATURES		DATE		MODEL	
±0.25		DRAWN	VMI	22/MAY/03		PLCC SOCKET	
CHECKED	ZOLA			22/MAY/03			
APPROVALS						PLCC000-P__T-P	

MMT CORPORATION

TEL:(510)979-2188

www.mmlmachrone.com

FAX:(510)979-2189