
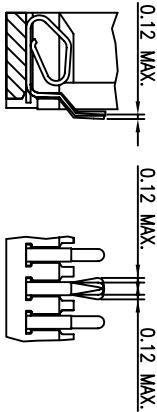
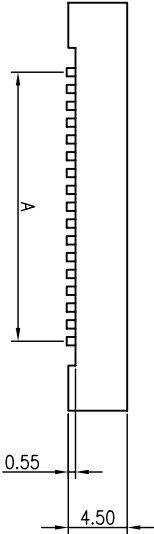




REVISIONS					
SYM	DESCRIPTION	DATE	APPROVED	SYM	DESCRIPTION
Δ				Δ	
Δ				Δ	
**CUSTOMER DRAWING FOR REFERENCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!					011

SPECIFICATION:
TEMPERATURE RANGE: -55~+105°C
CURRENT RATING: 1A
DIELECTRIC WITHSTANDING VOLTAGE: AC 500V FOR 1 MINUTE
WITHSTANDING VOLTAGE: AC 600V R.M.S.
INSULATION RESISTANCE: 1000MΩ MIN AT DC 500V.
CONTACT RESISTANCE: 30mΩ MAX AT DC 100mA.
CONTACT MATERIAL: PHOSPHOR BRONZE.

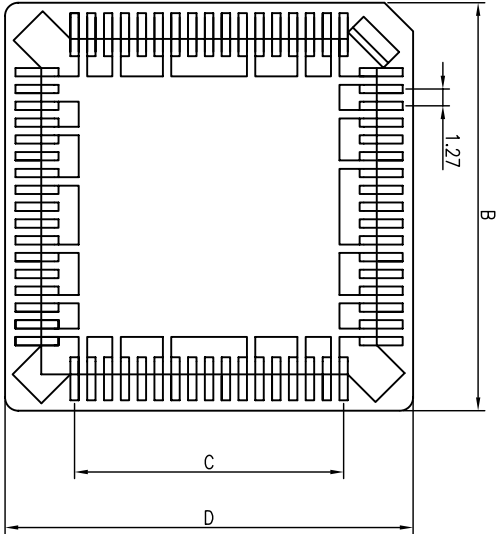

TERMINAL DETAIL (8/1)

MODEL NO.	NO. OF CONTACT	DIMENSION			
		A	B	C	D
PLCC000-Pt20T-PS	20	5.08	15.24	5.08	15.64
PLCC000-Pt28T-PS	28	7.62	17.78	7.62	17.78
PLCC000-Pt32T-PS	32	7.62	18.20	10.16	20.74
PLCC000-Pt44T-PS	44	12.70	23.28	12.70	23.28
PLCC000-Pt52T-PS	52	15.24	25.40	15.24	25.40
PLCC000-Pt68T-PS	68	20.32	30.82	20.32	30.82
PLCC000-Pt84T-PS	84	25.40	35.90	25.40	35.90

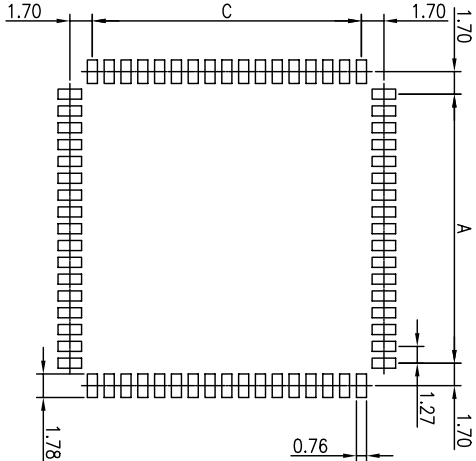

TOLERANCES UNLESS OTHERWISE SPECIFIED		SIGNATURES		DATE		MODEL	
±0.25		DRAWN	AARON	13/NOV/06		PLCC SOCKET	
		CHECKED	WENDY	13/NOV/06			
SYMBOL	UNIT	SCALE	APPROVALS				
Δ	mm	1/1				PLCC000-Pt__T-PS	

MMT CORPORATION